



# Olympic-S



④




①









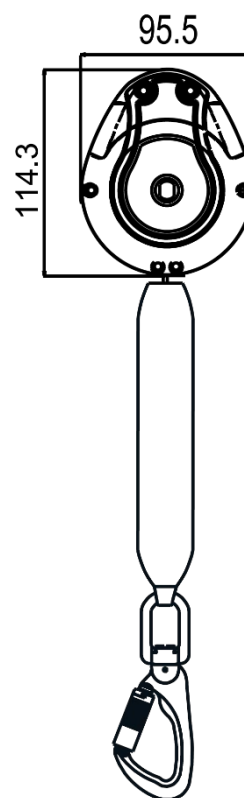

②



③



<b>HS CODE</b>
8479 89 97
<b>CARTON SIZE / PCS.</b>
60 x 40 x 24 cm / 16
<b>AET N° 277/10834-02/E01-01</b>
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
<b>MODULE D IN14/14003</b>
<b>SGS United Kingdom Ltd., N°0120</b> Unit 202B, Worle Parkway, Weston-super-Mare, BS22 6WA, United Kingdom

REF.	FA 20 503 01
 LG. KG	1.75 m
	-----
	MAX. 100 KG
CE	EN 360:2002   DIN 19427 : 2017
 MAT.	Polyamide 6 - 30% fiber glass
	Aramid 21 mm
	 FA 50 224 18 / FA 50 221 17
	x2
R(kN)	15 kN
	YES – DOUBLE SHARP EDGE (R>0.5 mm)
+	DIN 19427
	0.77 KG



**Longueur** Poids maxi utilisateur  
**Length** Max. user weight  
**Longitud** Peso máximo del usuario  
**Lunghezza** Peso Max. dell'utente  
**Länge** Höchstgewicht des Benutzers

MAT.



**Matière carter / sangle**  
 Material of casing / webbing  
**Material cárter / correa**  
 Material dei carter / Cinghia  
**Material Gehäuse / Gurt**



**Matière connecteur haut / connecteur bas**  
 Material of top connector / bottom connector  
**Material conector alto / conector bajo**  
 Materiale connettore alto / connettore basso  
**Material oberes / unteres Verbindungselement**



**Nombre d'émerillons**  
 Number of swivels  
**Cantidad de eslabones giratorios**  
 Numero di tornichetti  
**Anzahl der Wirbel**



**Utilisation possible dans une PEMP (Plateforme Élévatrice Mobile de Personne) où le risque de chute à proximité d'une double arête vive est présent.**

Can be used in a MEWP (Mobile Elevating Working Platform) where the risk of falling near a double sharp edge is present

**Uso posible en una PEMP (Plataforma Elevadora Móvil de Personas), donde hay un riesgo de caída cerca de una doble arista viva.**

Possibilità di utilizzare il dispositivo in una PLE (piattaforma di lavoro mobile elevabile) in cui sussiste il rischio di caduta in prossimità di un doppio spigolo vivo.

**Einsatz auf mobiler Hubarbeitsbühne möglich, wo ein Absturzrisiko nahe einer doppelten scharfen Kante besteht.**